



Level 5  
Model BBD-5 / Bullet & Recherché Resistant Bronze Door Assembly

Assembly	Ballistica™ built-to-order bullet resistant bronze door assemblies come complete with door, frame and lite kit (if applicable). For both interior or exterior locations. Oversized industrial assemblies available.
Material	Alloy 464 Naval Brass
Door Edges	1-3/4" thick, beveled 1/8" in 2"
Core	Proprietary; lead, asbestos, fiberglass & formaldehyde free
Glazing	1. 1-5/16" Glass Clad Polycarbonate required See <a href="#">Glass</a> 2. Glass & glazing not included, standard 3. Factory installed glazing option insures optimal performance
Hardware	Hardware including hinges, bullet-resistant threshold & latch-set can be provided and factory installed upon request.
Seals	1. Seal-Tek™ Perimeter Weather Seals, optional 2. Air-Tek™ Door Edge, optional
Frames	See <a href="#">Frame Profiles</a> and <a href="#">Frame Elevations</a>
Finishes	See <a href="#">Abraded Finishes</a> See <a href="#">Patina Finishes</a>
Fire Rating	Per UL10C / UBC7-2 Positive Pressure Up to 3 Hour Rating See <a href="#">Fire Rated</a>
Sound	See <a href="#">Sound Control</a>

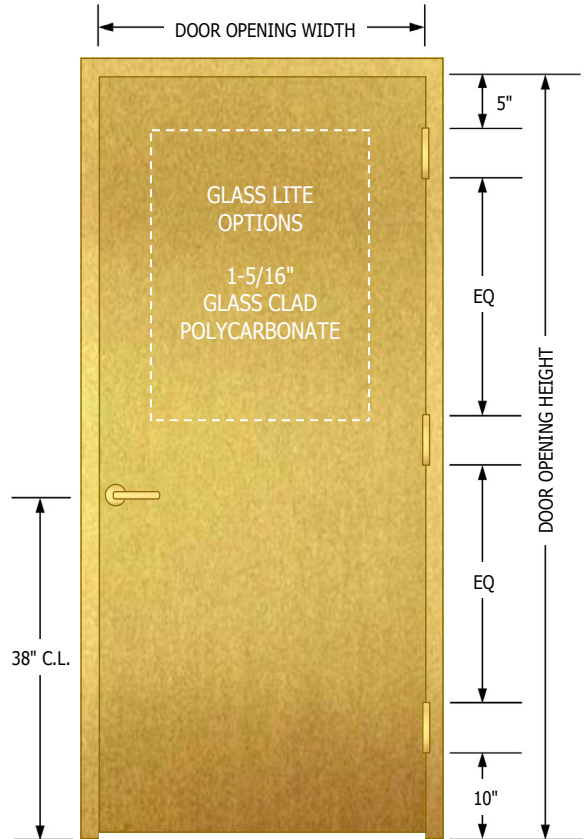

GLASS LITES  
See [Door Elevations](#)  
See [Lite Kit Options](#)

UL752 Level 5 Test Criteria

Independently tested in accordance with UL 752 (10-5-05) requirements

Weapon	Ammunition	Shots	Velocity (ft/sec)	Shot Spacing	Witness Plate	Test Temperature
H&K G3, 7.62 X 51 NATO	.30 cal, 7.62 NATO, 150 gr. FMJ	1	2,750 to 3,025	1 shot, centered	.125 cardboard @ 18"	(-26/72) 55, 72, 95, 120F

