


Level 3

Model BSD-3 / Bullet & Recherché Resistant Steel Door Assembly

| | |
|-------------|--|
| Assembly | Ballistica™ built-to-order bullet resistant steel door assemblies come complete with door, frame and lite kit (if applicable). For both interior or exterior locations. Oversized industrial assemblies available. |
| Material | 1. Cold Rolled Steel 2. A60 Galvanized |
| Door Edges | 1-3/4" thick, beveled 1/8" in 2" |
| Core | Proprietary; lead, asbestos, fiberglass & formaldehyde free |
| Glazing | 1. 1-1/8" Glass Clad Polycarbonate required See Glass 2. Glass & glazing not included, standard 3. Factory installed glazing option insures optimal performance |
| Hardware | Hardware including hinges, bullet-resistant threshold & latch-set can be provided and factory installed upon request. |
| Seals | 1. Seal-Tek™ Perimeter Weather Seals, optional 2. Air-Tek™ Door Edge, optional |
| Frames | See Frame Profiles and Frame Elevations |
| Finishes | Gray, EPA Approved, Alkyd, zinc compound primer, standard Finish paint also available See Finishes |
| Fire Rating | Per UL10C / UBC7-2 Positive Pressure Up to 3 Hour Rating See Fire Rated |
| Sound | See Sound Control |

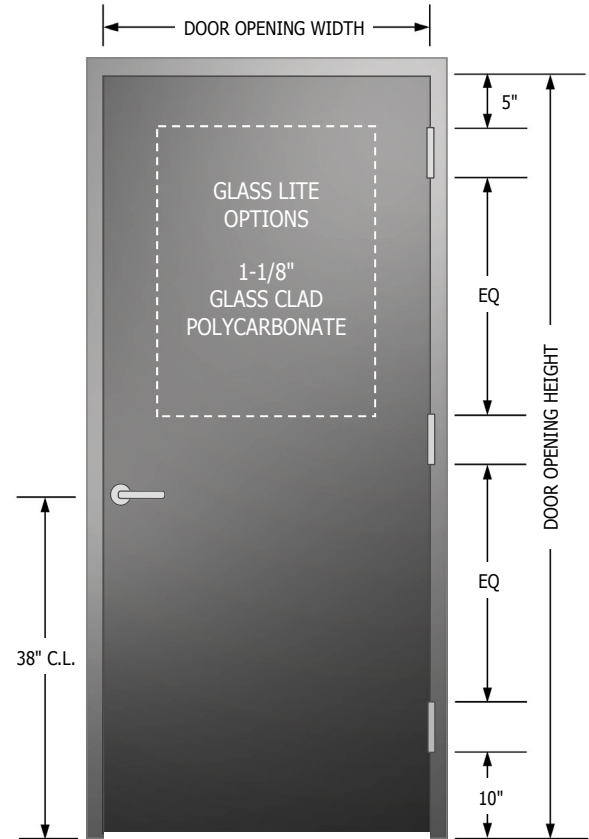


GLASS LITES
See [Door Elevations](#)
See [Lite Kit Options](#)

UL752 Level 3 Test Criteria

Independently tested in accordance with UL 752 (10-5-05) requirements

| Weapon | Ammunition | Shots | Velocity (ft/sec) | Shot Spacing | Witness Plate | Test Temperature |
|-----------------|----------------------|-------|-------------------|------------------------|----------------------|---------------------------|
| Colt .44 Magnum | .44 Mag, 240 gr. SWC | 3 | 1,350 to 1,485 | 3 shots, 4.5" triangle | .125 cardboard @ 18" | (-26/72) 55, 72, 95, 120F |

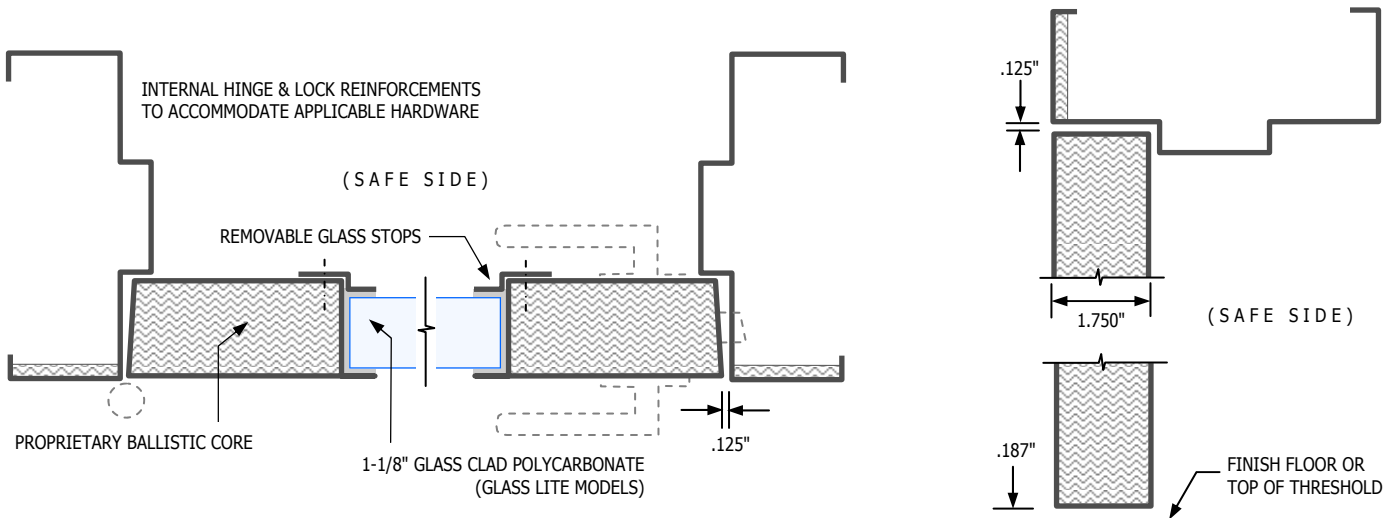

Think Green.

Recycled materials and long life cycle make Ballistica™ a truly sustainable choice.