


Level 5
Model BSD-5 / Bullet & Recherché Resistant Steel Door Assembly

Assembly	Ballistica™ built-to-order bullet resistant steel door assemblies come complete with door, frame and lite kit (if applicable). For both interior or exterior locations. Oversized industrial assemblies available.
Material	1. Cold Rolled Steel 2. A60 Galvanized
Door Edges	1-3/4" thick, beveled 1/8" in 2"
Core	Proprietary; lead, asbestos, fiberglass & formaldehyde free
Glazing	1. 1-5/16" Glass Clad Polycarbonate required See Glass 2. Glass & glazing not included, standard 3. Factory installed glazing option insures optimal performance
Hardware	Hardware including hinges, bullet-resistant threshold & latch-set can be provided and factory installed upon request.
Seals	1. Seal-Tek™ Perimeter Weather Seals, optional 2. Air-Tek™ Door Edge, optional
Frames	See Frame Profiles and Frame Elevations
Finishes	Gray, EPA Approved, Alkyd, zinc compound primer, standard Finish paint also available See Finishes
Fire Rating	Per UL10C / UBC7-2 Positive Pressure Up to 3 Hour Rating See Fire Rated
Sound	See Sound Control

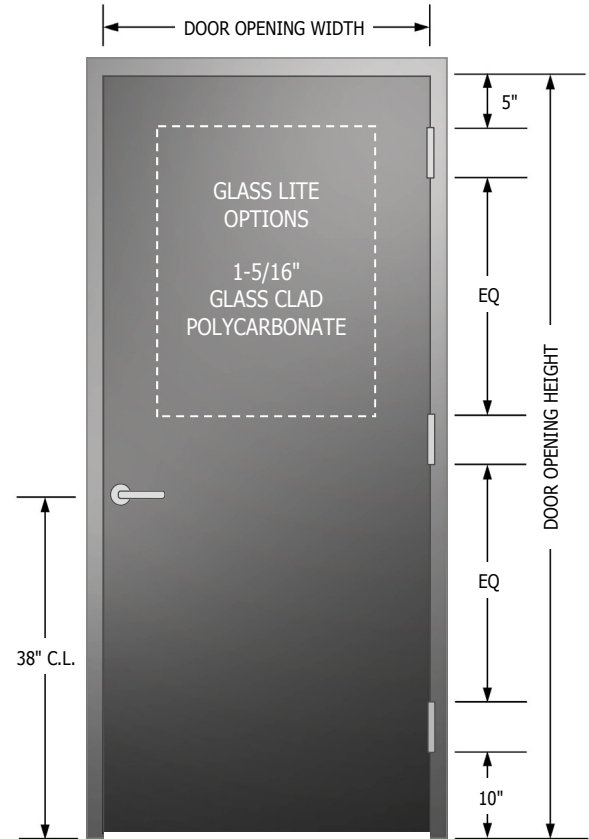

GLASS LITES
See [Door Elevations](#)
See [Lite Kit Options](#)

UL752 Level 5 Test Criteria

Independently tested in accordance with UL 752 (10-5-05) requirements

Weapon	Ammunition	Shots	Velocity (ft/sec)	Shot Spacing	Witness Plate	Test Temperature
H&K G3, 7.62 X 51 NATO	.30 cal, 7.62 NATO, 150 gr. FMJ	1	2,750 to 3,025	1 shot, centered	.125 cardboard @ 18"	(-26/72) 55, 72, 95, 120F

