



**Level 5**  
**Model BSSD-5 / Bullet & Recherché Resistant SS Door Assembly**

Assembly	Ballistica™ built-to-order bullet resistant stainless steel door assemblies come complete with door, frame and lite kit (if applicable). For both interior or exterior locations. Oversized industrial assemblies available.
Material	1. 304 Stainless Steel 2. 316 Stainless Steel See <a href="#">Types of Stainless Steel</a>
Door Edges	1-3/4" thick, beveled 1/8" in 2"
Core	Proprietary; <b>lead, asbestos, fiberglass &amp; formaldehyde free</b>
Glazing	1. 1-5/16" Glass Clad Polycarbonate required See <a href="#">Glass</a> 2. Glass & glazing not included, standard 3. <b>Factory installed glazing option insures optimal performance</b>
Hardware	Hardware including hinges, bullet-resistant threshold & latch-set can be provided and factory installed upon request.
Seals	1. <a href="#">Seal-Tek™</a> Perimeter Weather Seals, optional 2. <a href="#">Air-Tek™</a> Door Edge, optional
Frames	See <a href="#">Frame Profiles</a> and <a href="#">Frame Elevations</a>
Finishes	See <a href="#">Abraded Finishes</a>
Fire Rating	Per UL10C / UBC7-2 Positive Pressure Up to 3 Hour Rating See <a href="#">Fire Rated</a>
Sound	See <a href="#">Sound Control</a>

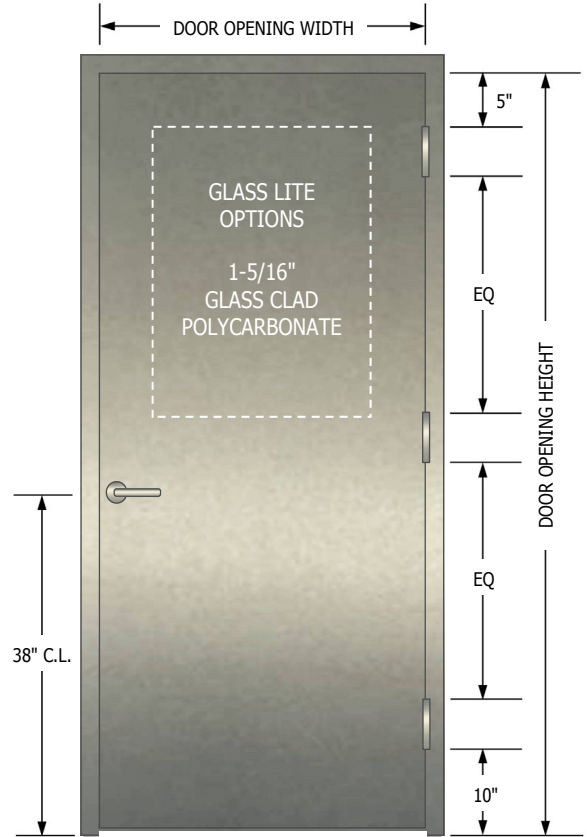

GLASS LITES  
See [Door Elevations](#)  
See [Lite Kit Options](#)

**UL752 Level 5 Test Criteria**

Independently tested in accordance with UL 752 (10-5-05) requirements

Weapon	Ammunition	Shots	Velocity (ft/sec)	Shot Spacing	Witness Plate	Test Temperature
H&K G3, 7.62 X 51 NATO	.30 cal, 7.62 NATO, 150 gr. FMJ	1	2,750 to 3,025	1 shot, centered	.125 cardboard @ 18"	(-26/72) 55, 72, 95, 120F

