


HPL Steel Doors High Pressure Laminate Faces

Description	HPL Laminate doors are built-to-order, suitable for interior locations.
NAAMM / HMMA	None
SDI	II/1, III/1, IV/1 (Open Seam Edge) II/2, III/2 & 3, IV/2 (Seamless Edge) (per A250.8-2003, Level / Model)
Material	1. Cold Rolled Steel 2. A60 or G90 Galvanized 3. Stainless Steel
Faces	18, 16, 14 or 12 GA
Door Edges	1-3/4" thick, beveled, 1/8" in 2"
Vertical Edges	1. Welded 3" OC, Seamless 2. Continuous Welded, Seamless 3. Open Seam See Vertical Door Edges
Top / Bottom	16 GA Channels See Door Top & Bottoms
Reinforcements	Hinges: 7 GA, 1-1/2" X 10" Locks: 11 GA or equal # threads Closers: 14 or 12 GA
Core	Various, per Spec
STC	See Sound Control
Fire Rating	See Fire Rated
Bullet Resistant	See Bullet Resistant
STD Primer	Gray, EPA Approved, Alkyd, zinc compound primer, standard Finish paint also available See Finishes
Edge Finish	Factory Finish Painted Door Edges to Match Laminate

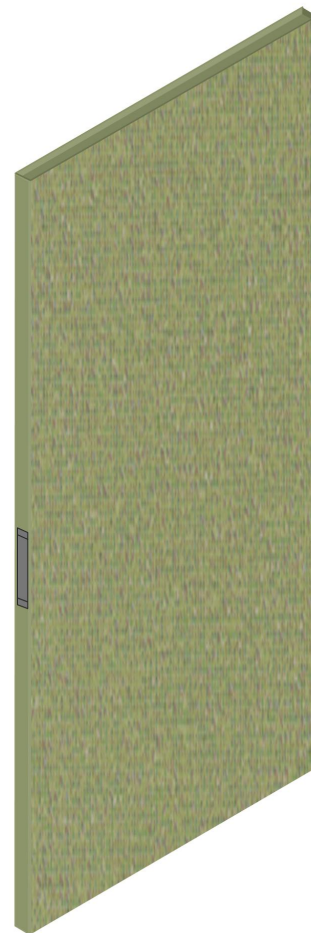

NOTE: Above door data varies depending on specific design criteria

- 1000s of colors and textures to choose from
- Permanently bonded laminate with no exposed fasteners or edge channels
- Designed for high frequency interior use without sacrificing aesthetics
- Hybrid options such as bullet resistant, fire rating, and sound control available

