




# Flush Double Egress Door Pair

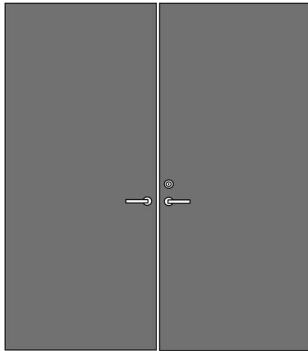

SAMPLE ELEVATION

For additional elevations, see [Doors > Elevations](#)


For additional data, see [Frames > Double Egress](#)

## Fire Rated Door Options

SIZE	FIRE RATING	MATERIAL	DOOR TYPE	CONSTRUCTION								
				Cladding	Astragal Required	Open Seam	Edge Welded	Glass Size per Glass Manufacturer	6" Min. Stile & Rail (1, 1-1/2, 3 HR)	10" Min. Bottom Rail	Max. 24 X 24 Listed Louver	
Max. Opening Size (in.)	3/4 Hour	18 Gauge	Steel Stiffened Core									
	1 Hour	16 Gauge	Honeycomb Core									
	1-1/2 Hour	14 Gauge	Temperature Rise Core									
	3 Hour	14 Gauge	Polystyrene Core									
96 X 96	3 Hour	14 Gauge	Temperature Rise Core	■	■	■	■	■	■	■	■	■
102 X 108	3 Hour	14 Gauge	Temperature Rise Core	■	■	■	■	■	■	■	■	■
120 X 120	3 Hour	14 Gauge	Temperature Rise Core	■	■	■	■	■	■	■	■	■

NOTE: Above door data varies depending on specific design criteria

All Stiles Fire Rated assemblies are built-to-order to your exact specifications. For assistance with design, labeling requirements and multiple integrated features, contact factory.

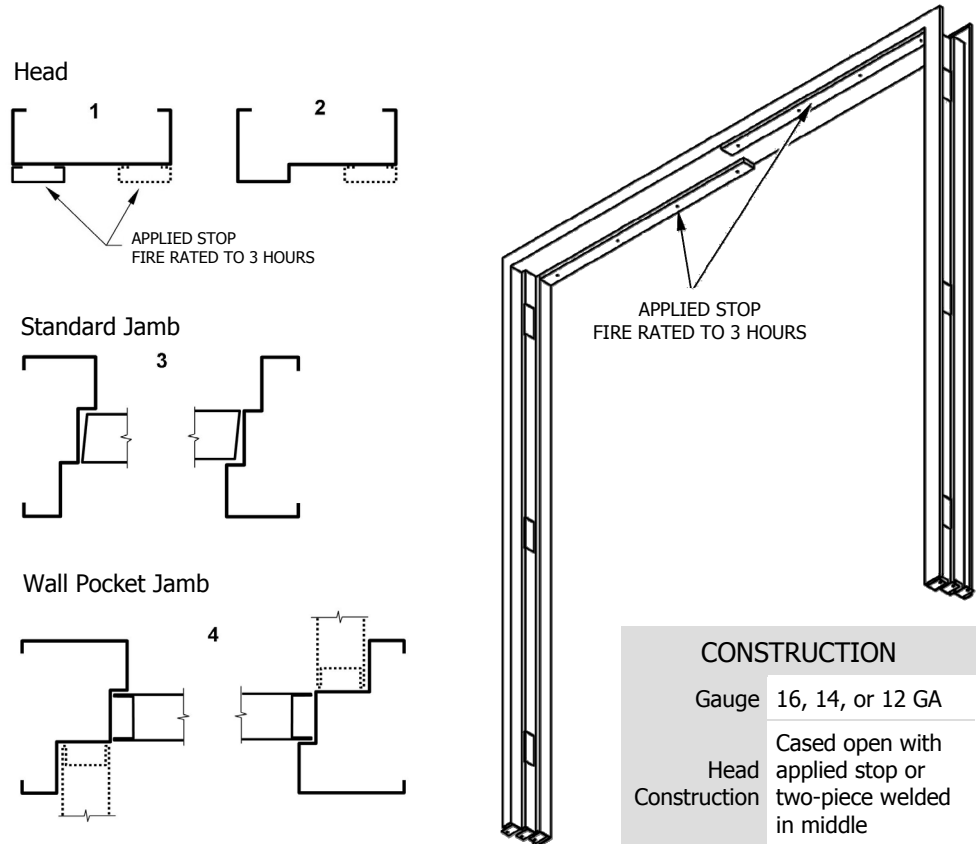

# Stiles®

Steel Door + Window Systems

© 2010 Stiles Custom Metal, Inc. 0710

Stiles Custom Metal Inc  
1885 Kinser Road  
Ceres CA USA 95307

T 209 / 538-3667  
F 209 / 538-2776

[www.stilesdoor.com](http://www.stilesdoor.com)