




# Double Egress Frame

## Fire Rated Frame Options



SAMPLE ELEVATION





SIZE	FIRE RATING							MATERIALS + CONST				LIMITATIONS												
	Max. Door Size (in.)	Single or Pair	Max. Overall Width	Max. Overall Height	Max. Panel Width	Max. Panel Height	20 Minute	3/4 Hour	1 Hour	1-1/2 Hour	3 Hour	16 Gauge	14 Gauge	12 Gauge	Welded	Stainless Steel	Seal-Tek™ Profile	Min. Throat Size	Max. Throat Size	Min. Face Width	Max. Face Width	Max. Head Height	Max. Sill Height	
96 X 120	PR						■	■	■	■	■	■	■	■	■			2	13	1 1/8	6	6		

NOTE: Above frame data varies depending on specific design criteria

All Stiles Fire Rated assemblies are built-to-order to your exact specifications. For assistance with design, labeling requirements and multiple integrated features, contact factory.

For additional options, see [Frames](#)

For additional data, see [Frames > Double Egress](#)

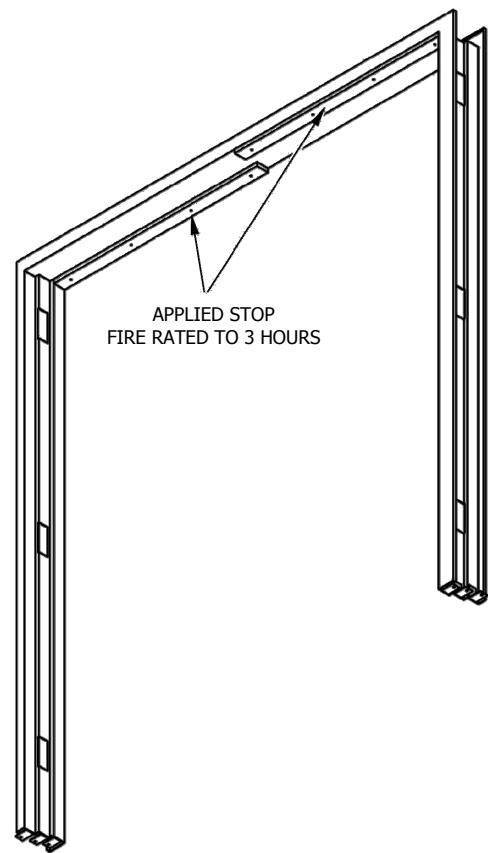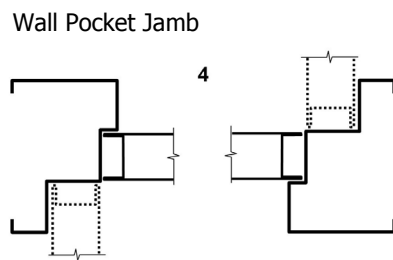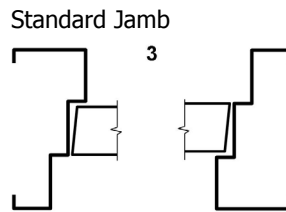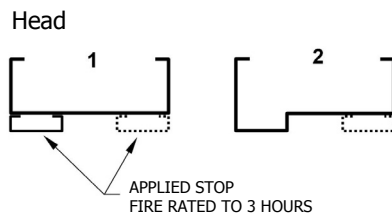

CONSTRUCTION	
Gauge	16, 14, or 12 GA
Head Construction	Cased open with applied stop or two-piece welded in middle

# Stiles®

Steel Door + Window Systems

© 2010 Stiles Custom Metal, Inc. 0710

Stiles Custom Metal Inc  
1885 Kinser Road  
Ceres CA USA 95307

T 209 / 538-3667  
F 209 / 538-2776  
[www.stilesdoor.com](http://www.stilesdoor.com)