


**Level 5**

**Model BSSW-5 / Bullet & Recherché Resistant SS Window**

Description	Ballistica™ built-to-order bullet resistant stainless steel windows come complete with frame, removable glass stops and stop fasteners.
Materials	1. 304 Stainless Steel 2. 316 Stainless Steel See <a href="#">Types of Stainless</a>
Frames	Fully welded frame is manufactured to accommodate any type of wall construction. Various designs available including single and multiple lites, transoms, sidelites, etc. See <a href="#">Frame Profiles</a> and <a href="#">Frame Elevations</a>
Glazing	1. 1-5/16" Glass Clad Polycarbonate required See <a href="#">Glass</a> 2. Glass and glazing not included (standard) 3. <b>Optional Factory installed glazing insures optimal performance</b> 4. Optional 5° Inclined glazing for glare reduction 5. Optional Concealed glass stop fasteners
Finishes	See <a href="#">Abraded Finishes</a>
Fire Rating	Per UL10C / UBC7-2 Positive Pressure Up to 1-1/2 Hour Rating See <a href="#">Fire Rated</a>
Sound	See <a href="#">Sound Control</a>

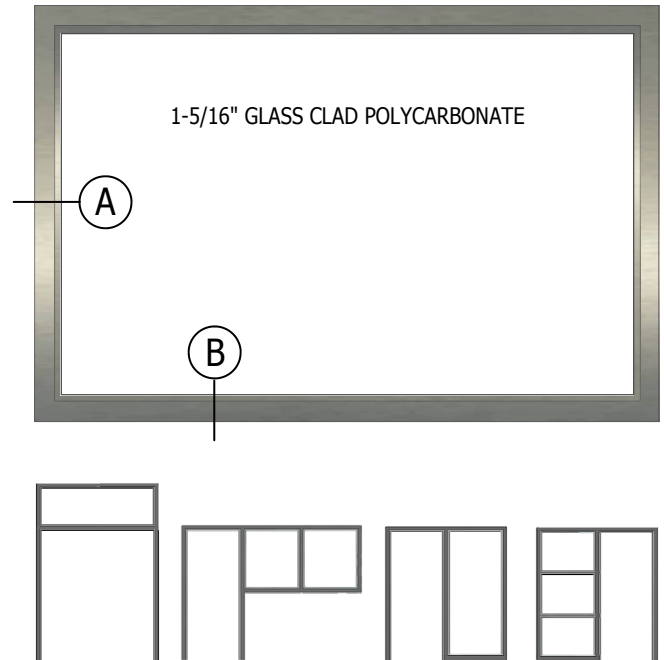

Built to order per customer's requirements  
Multiple frame configurations and profile options available

**UL752 Level 5 Test Criteria**

Independently tested in accordance with UL 752 (10-5-05) requirements

Weapon	Ammunition	Shots	Velocity (ft/sec)	Shot Spacing	Witness Plate	Test Temperature
H&K G3, 7.62 X 51 NATO	.30 cal, 7.62 NATO, 150 gr. FMJ	1	2,750 to 3,025	1 shot, centered	.125 cardboard @ 18"	(-26/72) 55, 72, 95, 120F

