



**Level 7**  
**Model BBD-7 / Bullet & Recherché Resistant Bronze Door Assembly**

Assembly	Ballistica™ built-to-order bullet resistant bronze door assemblies come complete with door, frame and lite kit (if applicable). For both interior or exterior locations. Oversized industrial assemblies available.
Material	Alloy 464 Naval Brass
Door Edges	1-3/4" thick, beveled 1/8" in 2"
Core	Proprietary; <b>lead, asbestos, fiberglass &amp; formaldehyde free</b>
Glazing	1. 1-7/8" Glass Clad Polycarbonate required See <a href="#">Glass</a> 2. Glass & glazing not included, standard 3. <b>Factory installed glazing option insures optimal performance</b>
Hardware	Hardware including hinges, bullet-resistant threshold & latch-set can be provided and factory installed upon request.
Seals	1. <b>Seal-Tek™</b> Perimeter Weather Seals, optional 2. <b>Air-Tek™</b> Door Edge, optional
Frames	See <a href="#">Frame Profiles</a> and <a href="#">Frame Elevations</a>
Finishes	See <a href="#">Abraded Finishes</a> See <a href="#">Patina Finishes</a>
Fire Rating	Per UL10C / UBC7-2 Positive Pressure Up to 3 Hour Rating See <a href="#">Fire Rated</a>
Sound	See <a href="#">Sound Control</a>

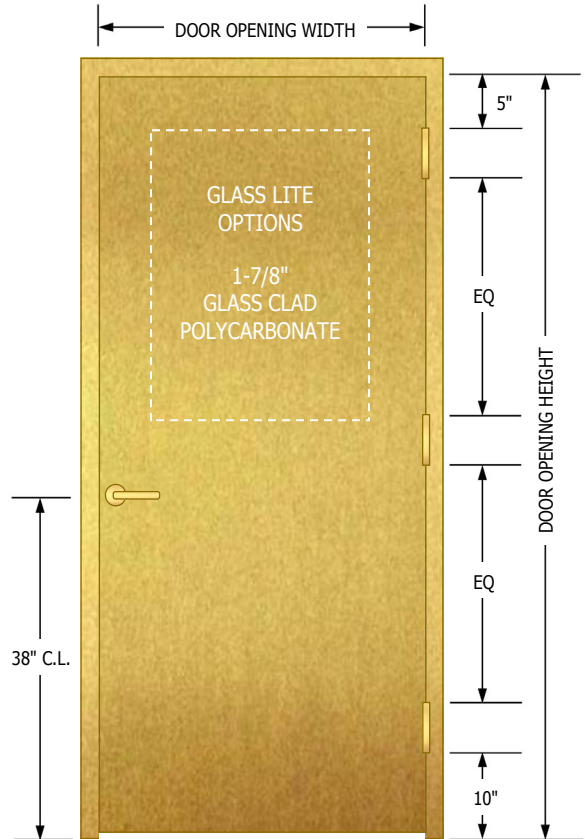

GLASS LITES  
See [Door Elevations](#)  
See [Lite Kit Options](#)

**UL752 Level 7 Test Criteria**

Independently tested in accordance with UL 752 (10-5-05) requirements

Weapon	Ammunition	Shots	Velocity (ft/sec)	Shot Spacing	Witness Plate	Test Temperature
Colt M16, 5.56 X 45 NATO	.223 cal, 5.56 NATO, 55 gr. FMJ	5	3,080 to 3,388	5 shots, 4.5" square	.125 cardboard @ 18"	72F

